PRELIMINARY ISSUE
THIS PLAN ISSUED FOR ADVANCE INFORMATION ONLY

TABLE 1

N.A.D. 1983 COORDINATES
OUTER HARBOR CHANNEL ANGLE POINTS AND CONTROL LINE

CHANNEL ∠ PT.	EASTING	NORTHING	CL ∠ PT.	EASTING	NORTHING
0–1	E 6020245.90	N 2118153.46	C1–0	E 6024016.87	N 2119632.35
0–2	E 6024147.07	N 2119037.66	C2–0	E 6025188.46	N 2119896.23
0–3	E 6026473.56	N 2119570.70	C3–0	E 6025737.33	N 2120062.50
0–4	E 6029195.32	N 2121154.59	C4–0	E 6028997.15	N 2121502.72
0–5	E 6032145.86	N 2123096.60	C5–0	E 6029354.80	N 2121699.81
0–6	E 6035035.47	N 2122691.23	C6–0	E 6032165.52	N 2123462.80
0–7	E 6037882.95	N 2125972.21	C7–0	E 6035180.13	N 2123505.95
0–8	E 6038502.15	N 2126685.68	C8–0	E 6037620.33	N 2126318.15
0–9	E 6038225.45	N 2126792.32	C9–0	E 6038054.24	N 2126382.46
0–10	E 6037357.62	N 2126663.70	C10–0	E 6039210.60	N 2126093.74
0–11	E 6035435.04	N 2124447.60			
0–12	E 6034521.88	N 2124383.85			
0–13	E 6034015.75	N 2124177.44			
0–14	E 6032185.18	N 2123829.00			
0–15	E 6028402.05	N 2121692.56			
0–16	E 6025557.78	N 2120540.54			
0–17	E 6023915.29	N 2120061.03			
0–18	E 6020014.00	N 2119177.46			

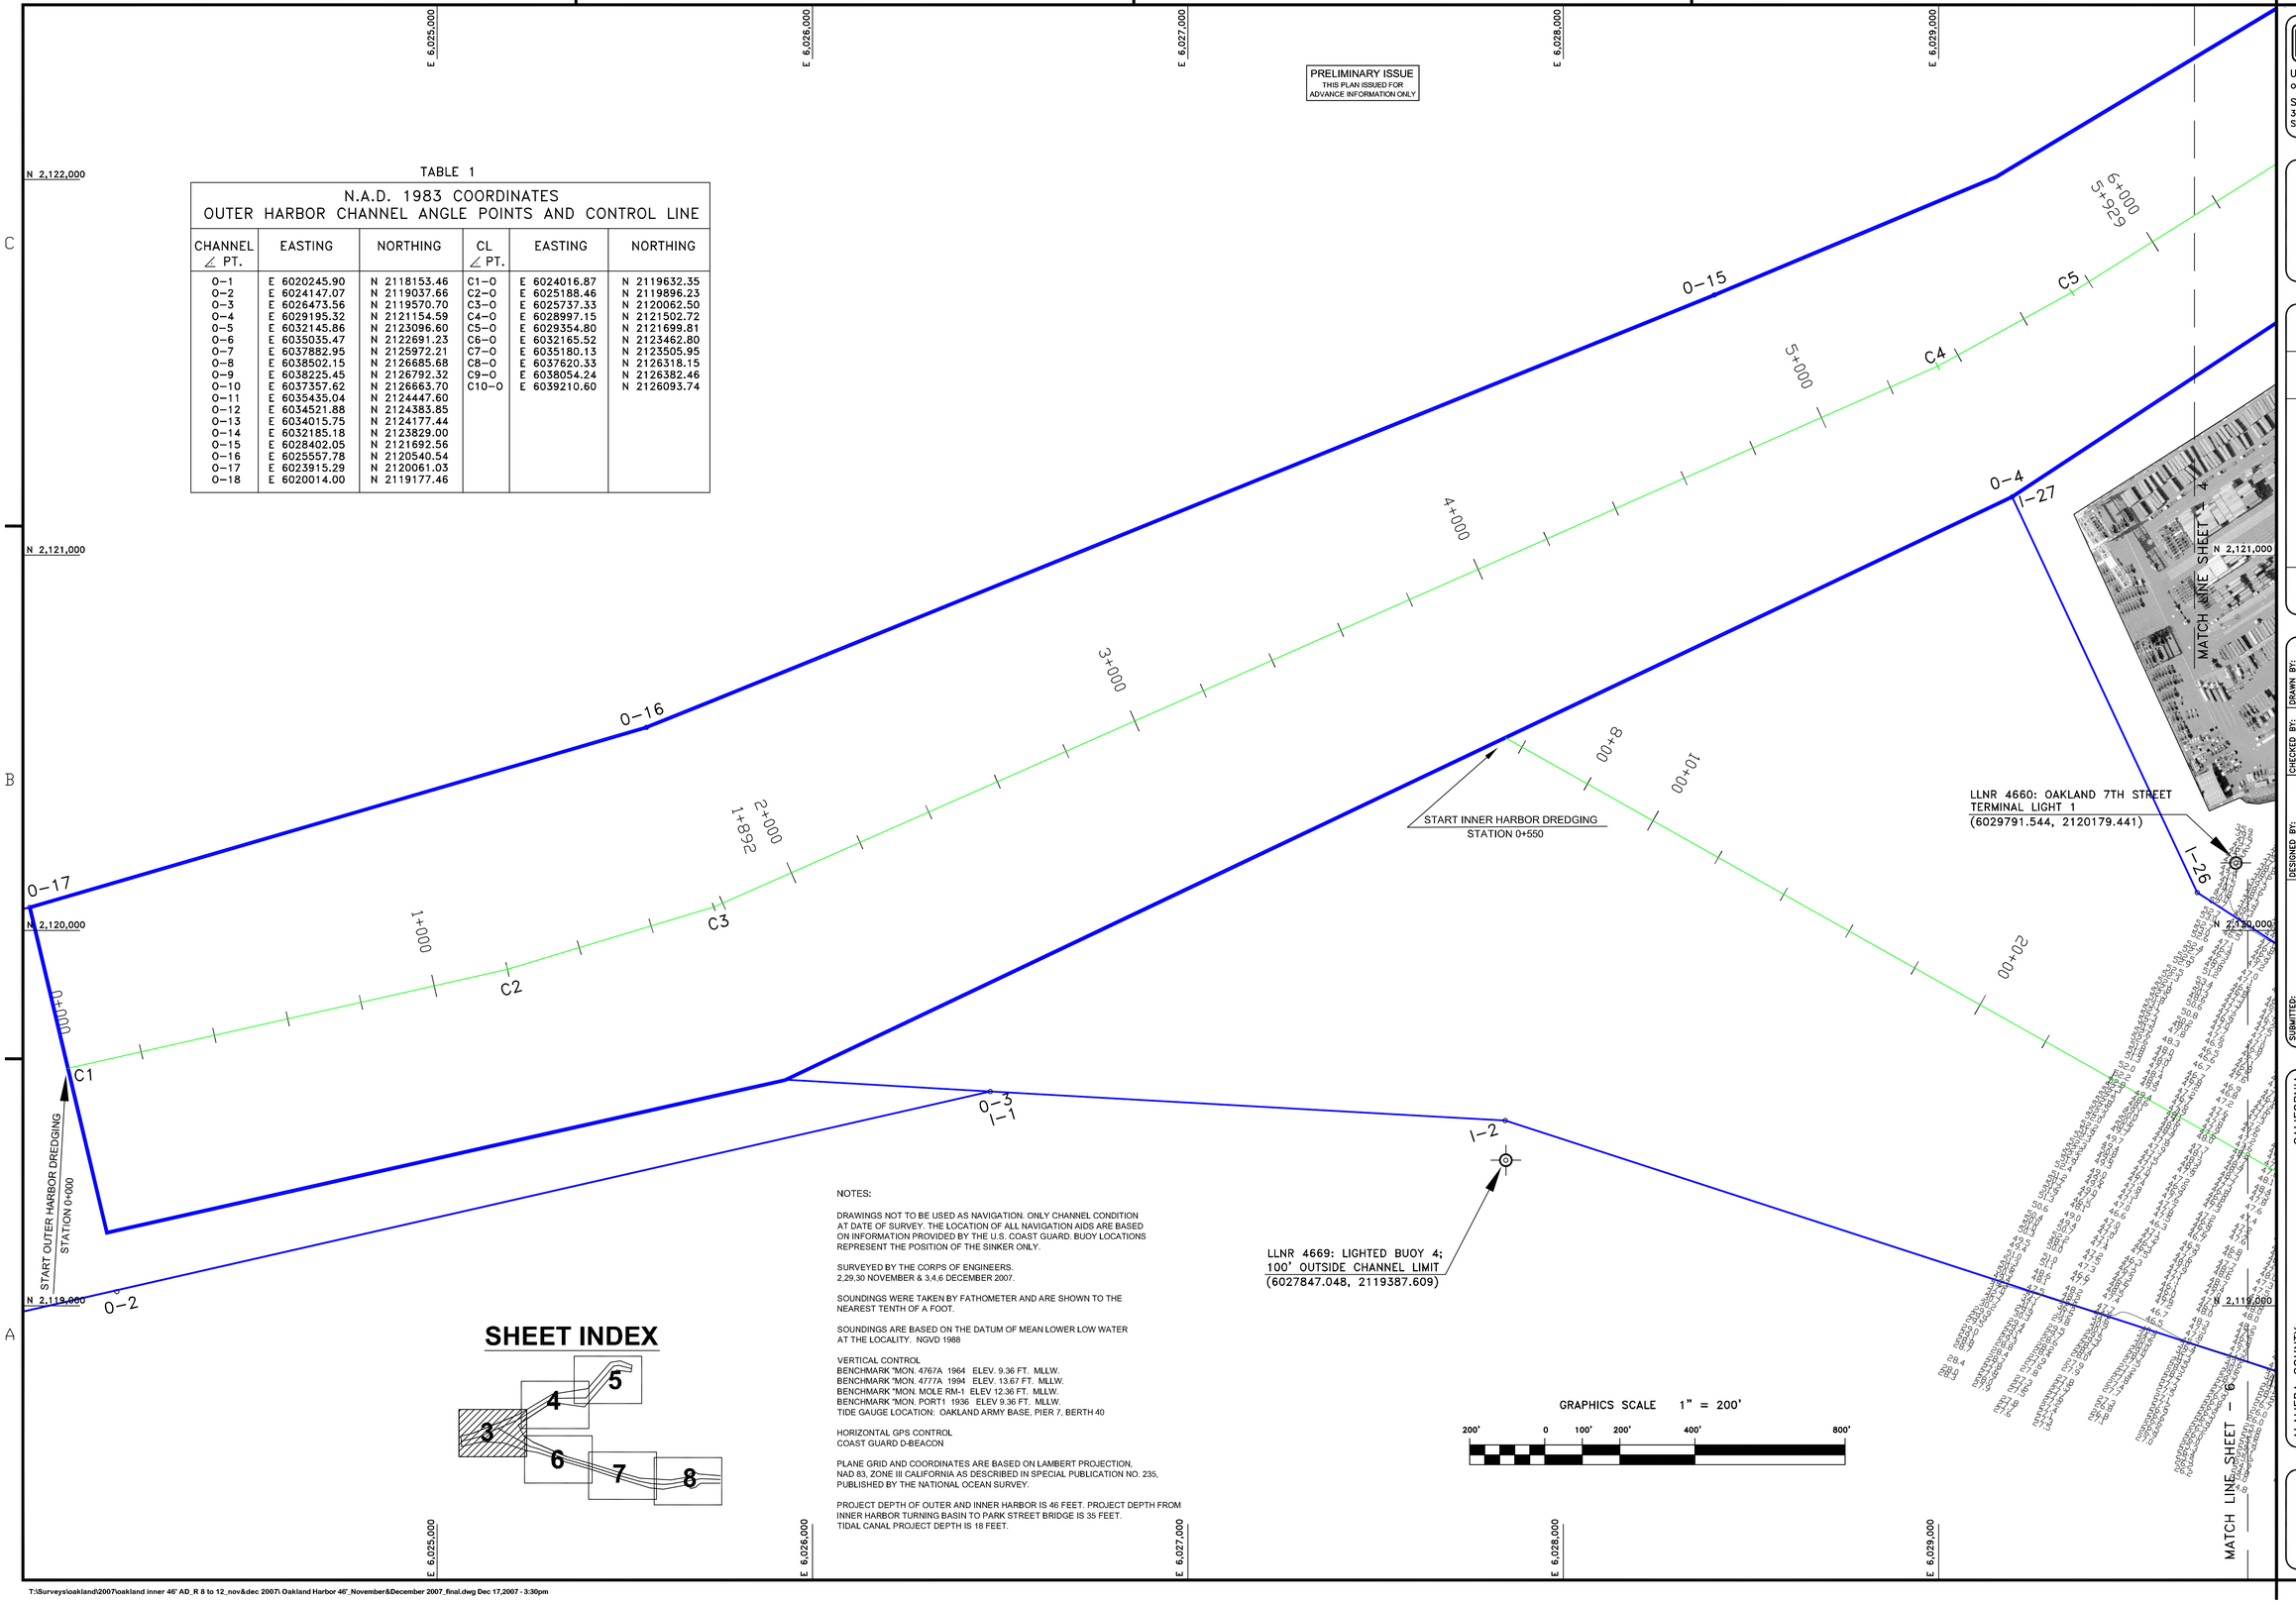

SHEET INDEX

NOTES:

DRAWINGS NOT TO BE USED AS NAVIGATION. ONLY CHANNEL CONDITION AT DATE OF SURVEY. THE LOCATION OF ALL NAVIGATION AIDS ARE BASED ON INFORMATION PROVIDED BY THE U.S. COAST GUARD. BUOY LOCATIONS REPRESENT THE POSITION OF THE SINKER ONLY.

SURVEYED BY THE CORPS OF ENGINEERS.
2,29,30 NOVEMBER & 3,4,6 DECEMBER 2007.

SOUNDINGS WERE TAKEN BY FATHOMETER AND ARE SHOWN TO THE NEAREST TENTH OF A FOOT.

SOUNDINGS ARE BASED ON THE DATUM OF MEAN LOWER LOW WATER AT THE LOCALITY. NGVD 1988

VERTICAL CONTROL
BENCHMARK "MON. 4767A 1964 ELEV. 9.36 FT. MLLW.
BENCHMARK "MON. 4777A 1994 ELEV. 13.67 FT. MLLW.
BENCHMARK "MON. MOLE RM-1 ELEV 12.36 FT. MLLW.
BENCHMARK "MON. PORT1 1936 ELEV 9.36 FT. MLLW.
TIDE GAUGE LOCATION: OAKLAND ARMY BASE, PIER 7, BERTH 40

HORIZONTAL GPS CONTROL
COAST GUARD D-BEACON

PLANE GRID AND COORDINATES ARE BASED ON LAMBERT PROJECTION, NAD 83, ZONE III CALIFORNIA AS DESCRIBED IN SPECIAL PUBLICATION NO. 235, PUBLISHED BY THE NATIONAL OCEAN SURVEY.

PROJECT DEPTH OF OUTER AND INNER HARBOR IS 46 FEET. PROJECT DEPTH FROM INNER HARBOR TURNING BASIN TO PARK STREET BRIDGE IS 35 FEET. TIDAL CANAL PROJECT DEPTH IS 18 FEET.

GRAPHICS SCALE 1" = 200'

200' 0 100' 200' 400' 800'

US Army Corps of Engineers
San Francisco District
333 Market Street
San Francisco, CA 94105

Mark	Description	Date	Appr.

DESIGNED BY:
SUBMITTED: TW
Hydro. Survey Team Leader
APPROVAL RECOMMENDED:
Chief, Technical Support Section
APPROVED:
Chief, Construction Branch

DRAWN BY: EWC
CHECKED BY: TVW
DATE: 12/05/2007
SHEET NO. 3 OF 8
DRAWING NO. 2 2 XXX

PREPARED UNDER THE DIRECTION OF
CRAIG W. KILEY
LT. COLONEL, C.E., DISTRICT ENGINEER

CALIFORNIA
ALAMEDA COUNTY

OAKLAND HARBOR
OAKLAND INNER/OUTER HARBOR
POSTDREDGE SURVEY
2,29,30 NOVEMBER & 3,4,6 DECEMBER 2007

Sheet reference number
C3

T:\Surveys\oakland\2007\oakland inner 46' AD_R 8 to 12_nov&dec 2007\ Oakland Harbor 46'_November&December 2007_final.dwg Dec 17,2007 - 3:30pm