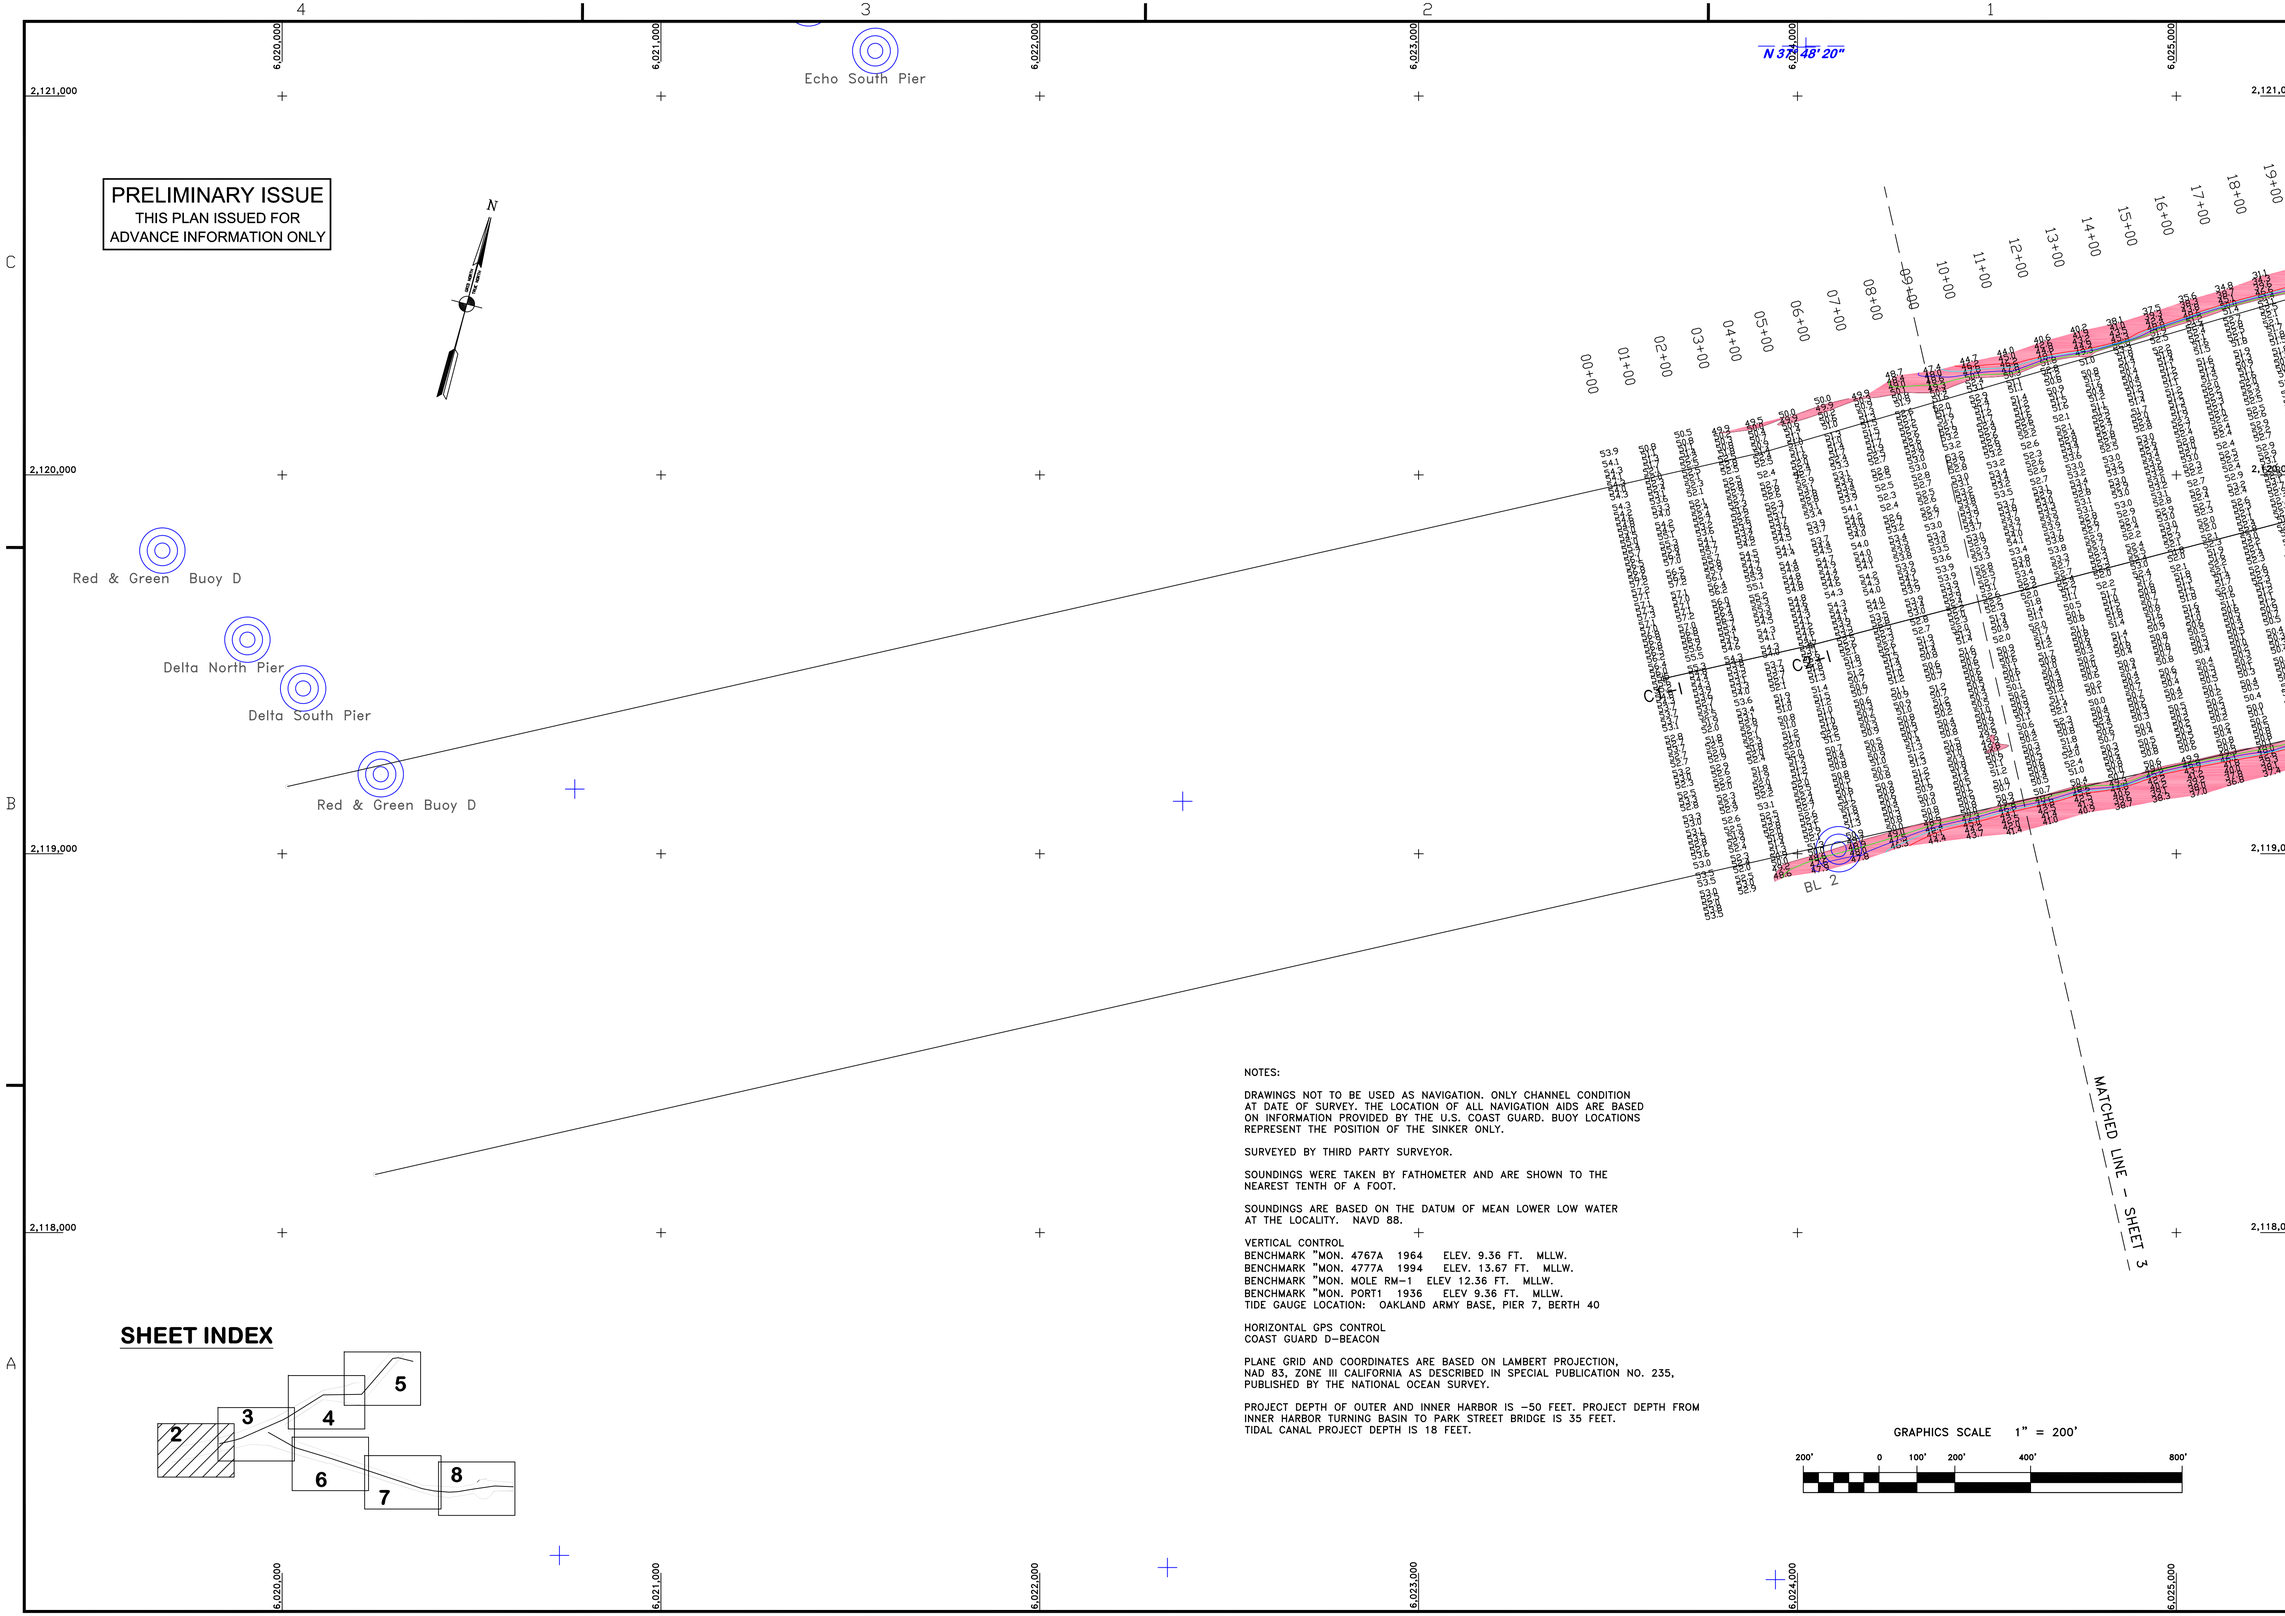

NOTES:

DRAWINGS NOT TO BE USED AS NAVIGATION. ONLY CHANNEL CONDITION AT DATE OF SURVEY. THE LOCATION OF ALL NAVIGATION AIDS ARE BASED ON INFORMATION PROVIDED BY THE U.S. COAST GUARD. BUOY LOCATIONS REPRESENT THE POSITION OF THE SINKER ONLY.

SURVEYED BY THIRD PARTY SURVEYOR.

SOUNDINGS WERE TAKEN BY FATHOMETER AND ARE SHOWN TO THE NEAREST TENTH OF A FOOT.

SOUNDINGS ARE BASED ON THE DATUM OF MEAN LOWER LOW WATER AT THE LOCALITY. NAVD 88.

VERTICAL CONTROL
BENCHMARK "MON. 4767A 1964 ELEV. 9.36 FT. MLLW.
BENCHMARK "MON. 4777A 1994 ELEV. 13.67 FT. MLLW.
BENCHMARK "MON. MOLE RM-1 ELEV 12.36 FT. MLLW.
BENCHMARK "MON. PORT1 1936 ELEV 9.36 FT. MLLW.
TIDE GAUGE LOCATION: OAKLAND ARMY BASE, PIER 7, BERTH 40

HORIZONTAL GPS CONTROL
COAST GUARD D-BEACON

PLANE GRID AND COORDINATES ARE BASED ON LAMBERT PROJECTION, NAD 83, ZONE III CALIFORNIA AS DESCRIBED IN SPECIAL PUBLICATION NO. 235, PUBLISHED BY THE NATIONAL OCEAN SURVEY.

PROJECT DEPTH OF OUTER AND INNER HARBOR IS -50 FEET. PROJECT DEPTH FROM INNER HARBOR TURNING BASIN TO PARK STREET BRIDGE IS 35 FEET. TIDAL CANAL PROJECT DEPTH IS 18 FEET.

GRAPHICS SCALE 1" = 200'

200' 0 100' 200' 400' 800'

SHEET INDEX

US Army Corps of Engineers
San Francisco District
1455 Market Street
San Francisco, CA 94103

Mark	Description	Date	Appr.

DESIGNED BY: PDT	CHECKED BY: PDT	DRAWN BY: PDT	
DATE: 4/12/2012	SHEET NO. 2 OF 8	DRAWING NO. 2	XXX

SUBMITTED: PDT
Hydro. Survey Team Leader
APPROVAL RECOMMENDED:
Chief, Geomatics Section
APPROVED:
Chief, Construction Branch

PREPARED UNDER THE DIRECTION OF
TORREY A. DICIRO
LT. COLONEL, C.E., DISTRICT ENGINEER

ALAMEDA COUNTY CALIFORNIA

OAKLAND HARBOR
INNER HARBOR
POSTDREDGE SURVEY
19 & 24 JANUARY, 3 FEBRUARY, 17 MARCH, 9 APRIL 2012

Sheet reference number
C2

\\SPN-WS3SF1\Branch_Folders\Construction\HydroSurvey\Admin\Surveys\oakland\2012\Inner\ 2011_Oakland_Inner_O&M_AD.dwg Apr 20,2012 - 1:36pm