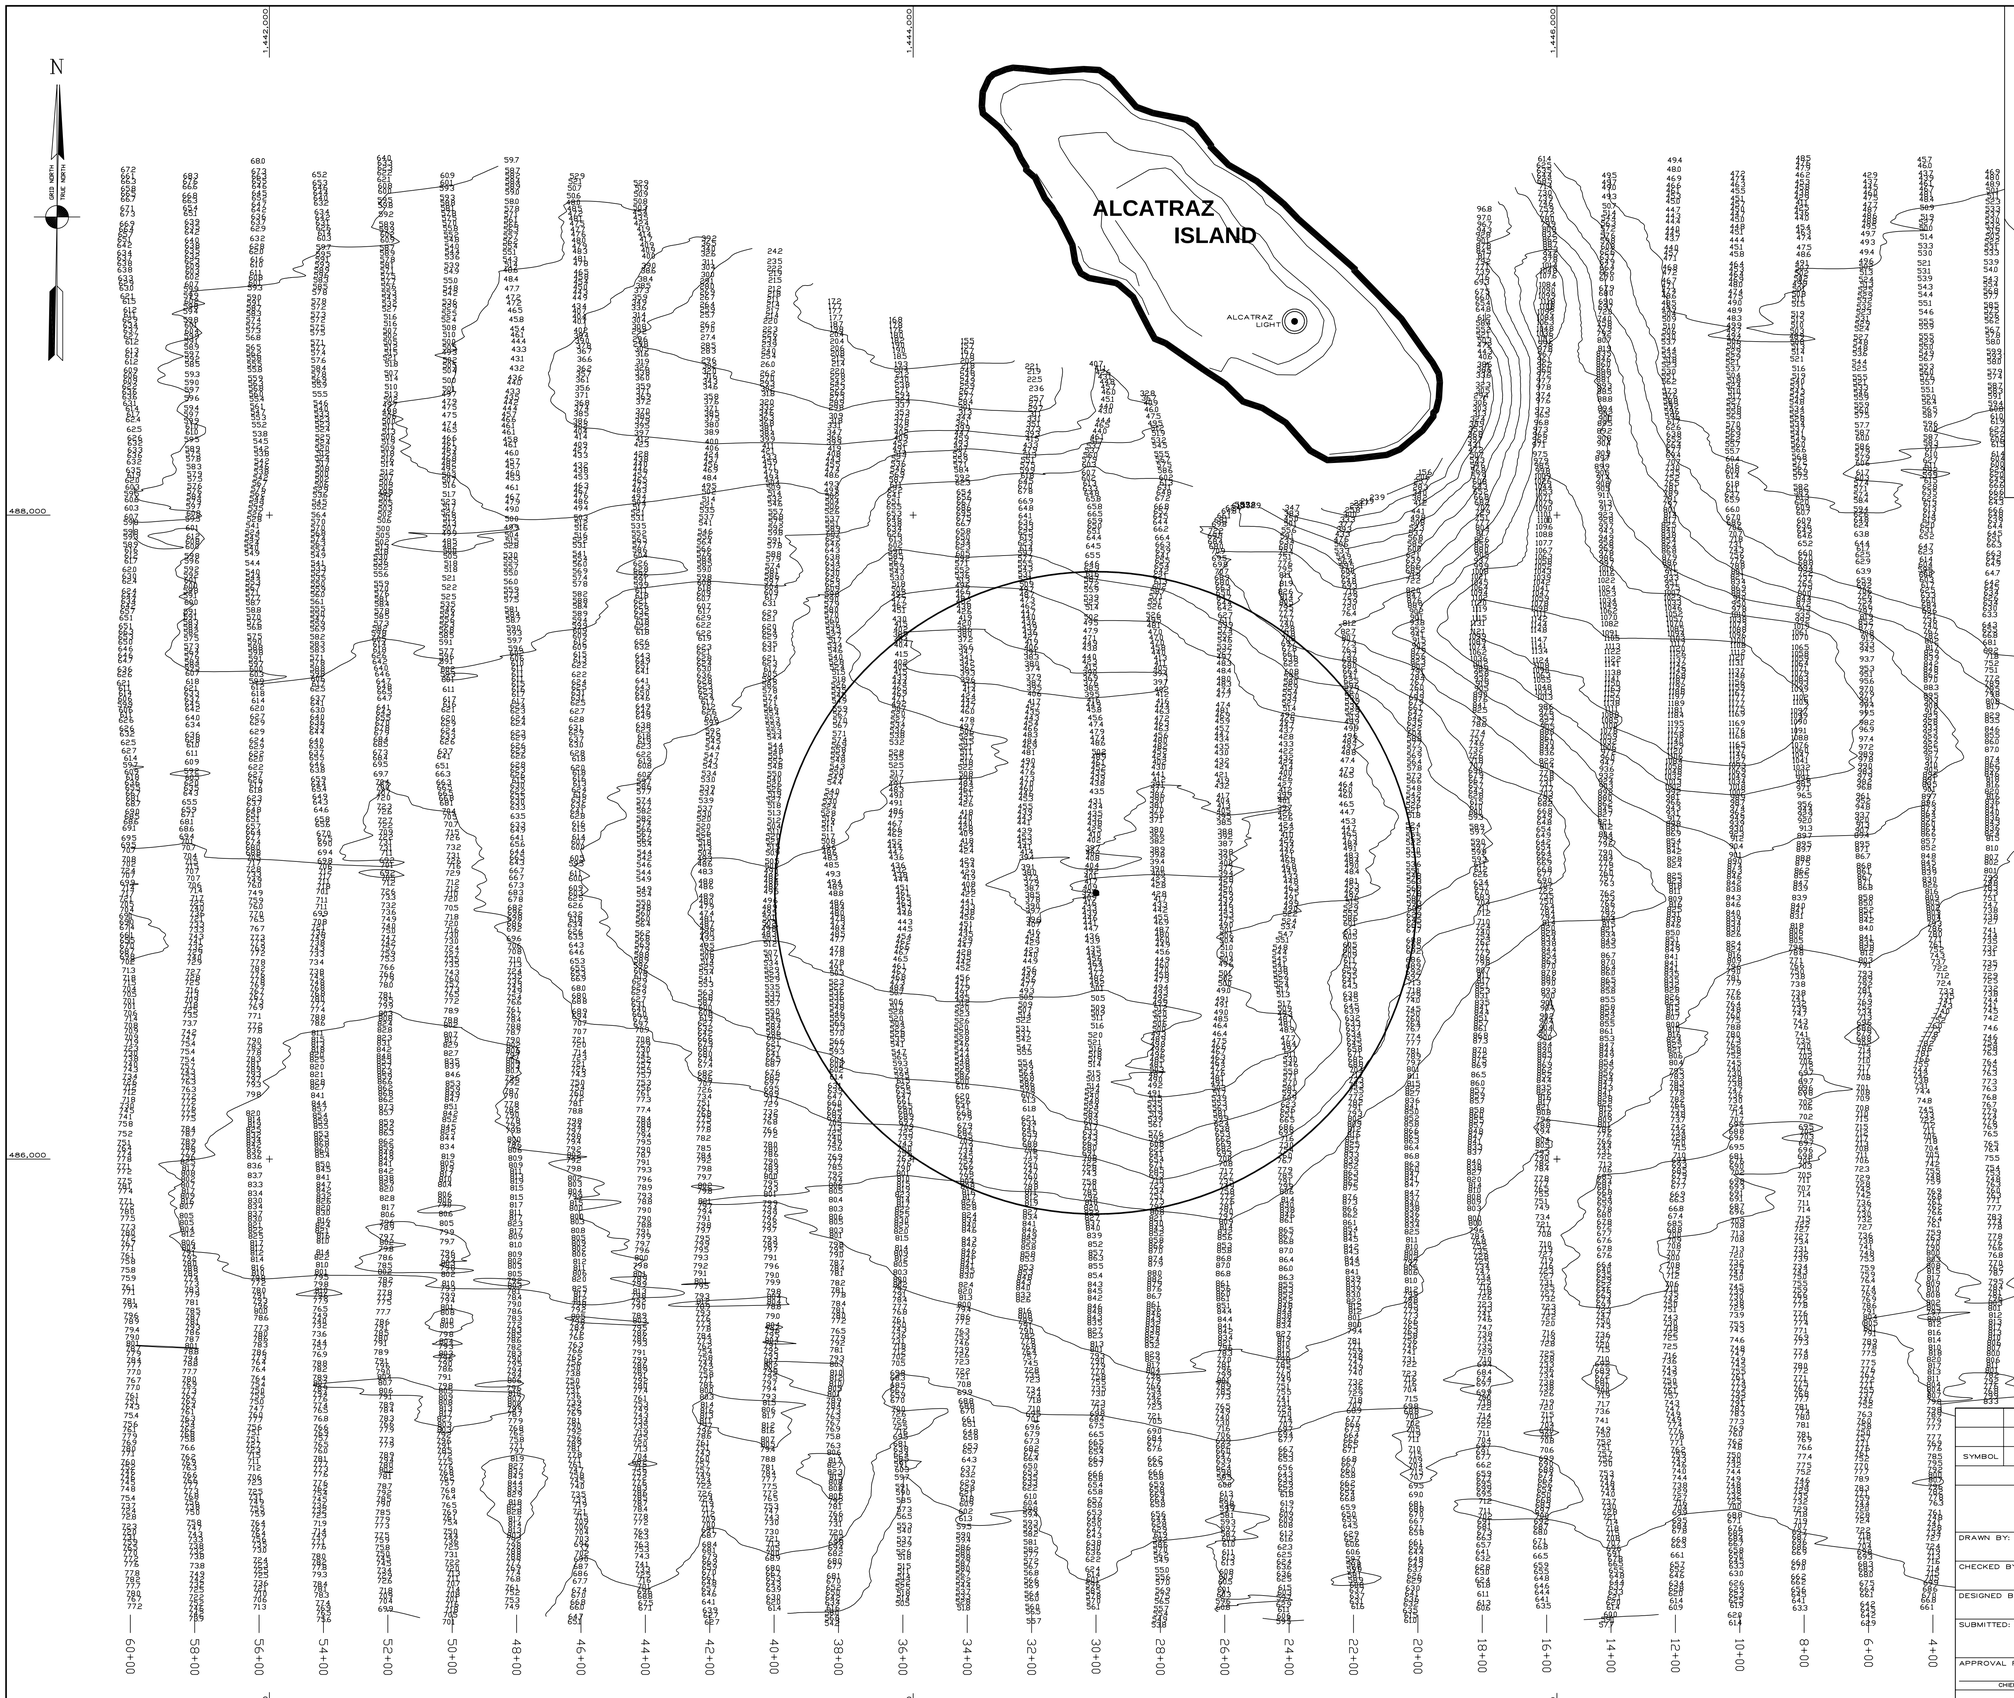

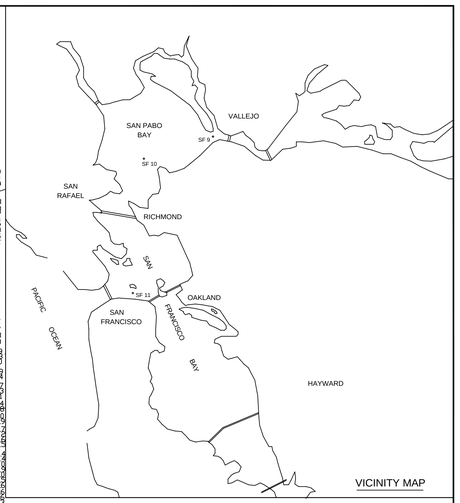

VICINITY MAP

LAMBERT COORDINATES		
POINT	X	Y
U.S.G.S. MON. 57 ELEV. – 14.00	1,444,000	482,882
TRANSAMERICA BUILDING	1,450,545	477,178
ALCATRAZ DISPOSAL SITE – (SF–11)		
1,000 FT. RADIUS	1,444,568	486,827
ALCATRAZ LIGHT	1,445,185	488,602
ALCATRAZ BUOY	1,445,000	486,778

NOTES:

DRAWING NOT TO BE USED AS NAVIGATION CHART
ONLY CHANNEL CONDITION AT DATE OF SURVEY
THE LOCATION OF ALL NAVIGATION AIDS ARE BASED ON INFORMATION PROVIDED BY THE U.S. COAST GUARD
BUOY LOCATIONS REPRESENT THE POSITION OF THE SINKER ONLY.

INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME.

SURVEYED BY THE CORPS OF ENGINEERS

SOUNDINGS ARE TAKEN BY FATHOMETER AND ARE SHOWN TO THE NEAREST FOOT AND TENTHS OF A FOOT.

SOUNDINGS ARE BASED ON THE DATUM OF MEAN LOWER LOW WATER AT THE LOCALITY.

PLANE GRID, BEARING AND COORDINATES ARE BASED ON THE STATE OF CALIFORNIA COORDINATE SYSTEM, LAMBERT CONFORMAL PROJECTION, ZONE III CALIFORNIA, AS DESCRIBED IN SPECIAL PUBLICATION NO. 253, PUBLISHED BY NATIONAL OCEAN SURVEY.

THE PROJECT DEPTH IS 40 FEET AT M.L.L.W.

SOUNDINGS ARE BASED ON THE TIDE GAUGE LOCATED AT THE HYDE STREET PIER, SAN FRANCISCO, CALIFORNIA.

VERTICAL CONTROL
BENCHMARK "56" ELEV. 12.71 FT MLLW

HORIZONTAL CONTROL
COAST GUARD D–BEACON

SYMBOL	DESCRIPTION	DATE	APPROVAL

REVISIONS

US ARMY CORPS OF ENGINEERS
San Francisco District

DRAWN BY:
CHECKED BY:
DESIGNED BY:
SUBMITTED:

SAN FRANCISCO CO. CALIFORNIA

ALCATRAZ DISPOSAL SITE - SF11
CONDITION SURVEY
5 APRIL 2002

APPROVAL RECOMMENDED:
CHIEF ENGINEERING BRANCH

APPROVED:
CHIEF ENGINEERING & TECHNICAL SERVICES DIVISION

DATE:

PREPARED UNDER THE DIRECTION OF
TIMOTHY S. O'ROURKE
LT. COLONEL, C.E., DISTRICT ENGINEER

SCALE: 1"=200'
JOB NO.:
DRAWING NUMBER
SHEET: 1 OF 1 | 1 | 2 | 628