PRELIMINARY ISSUE
DATE: 24 OCTOBER 2002
THIS PLAN ISSUED FOR
ADVANCE INFORMATION ONLY

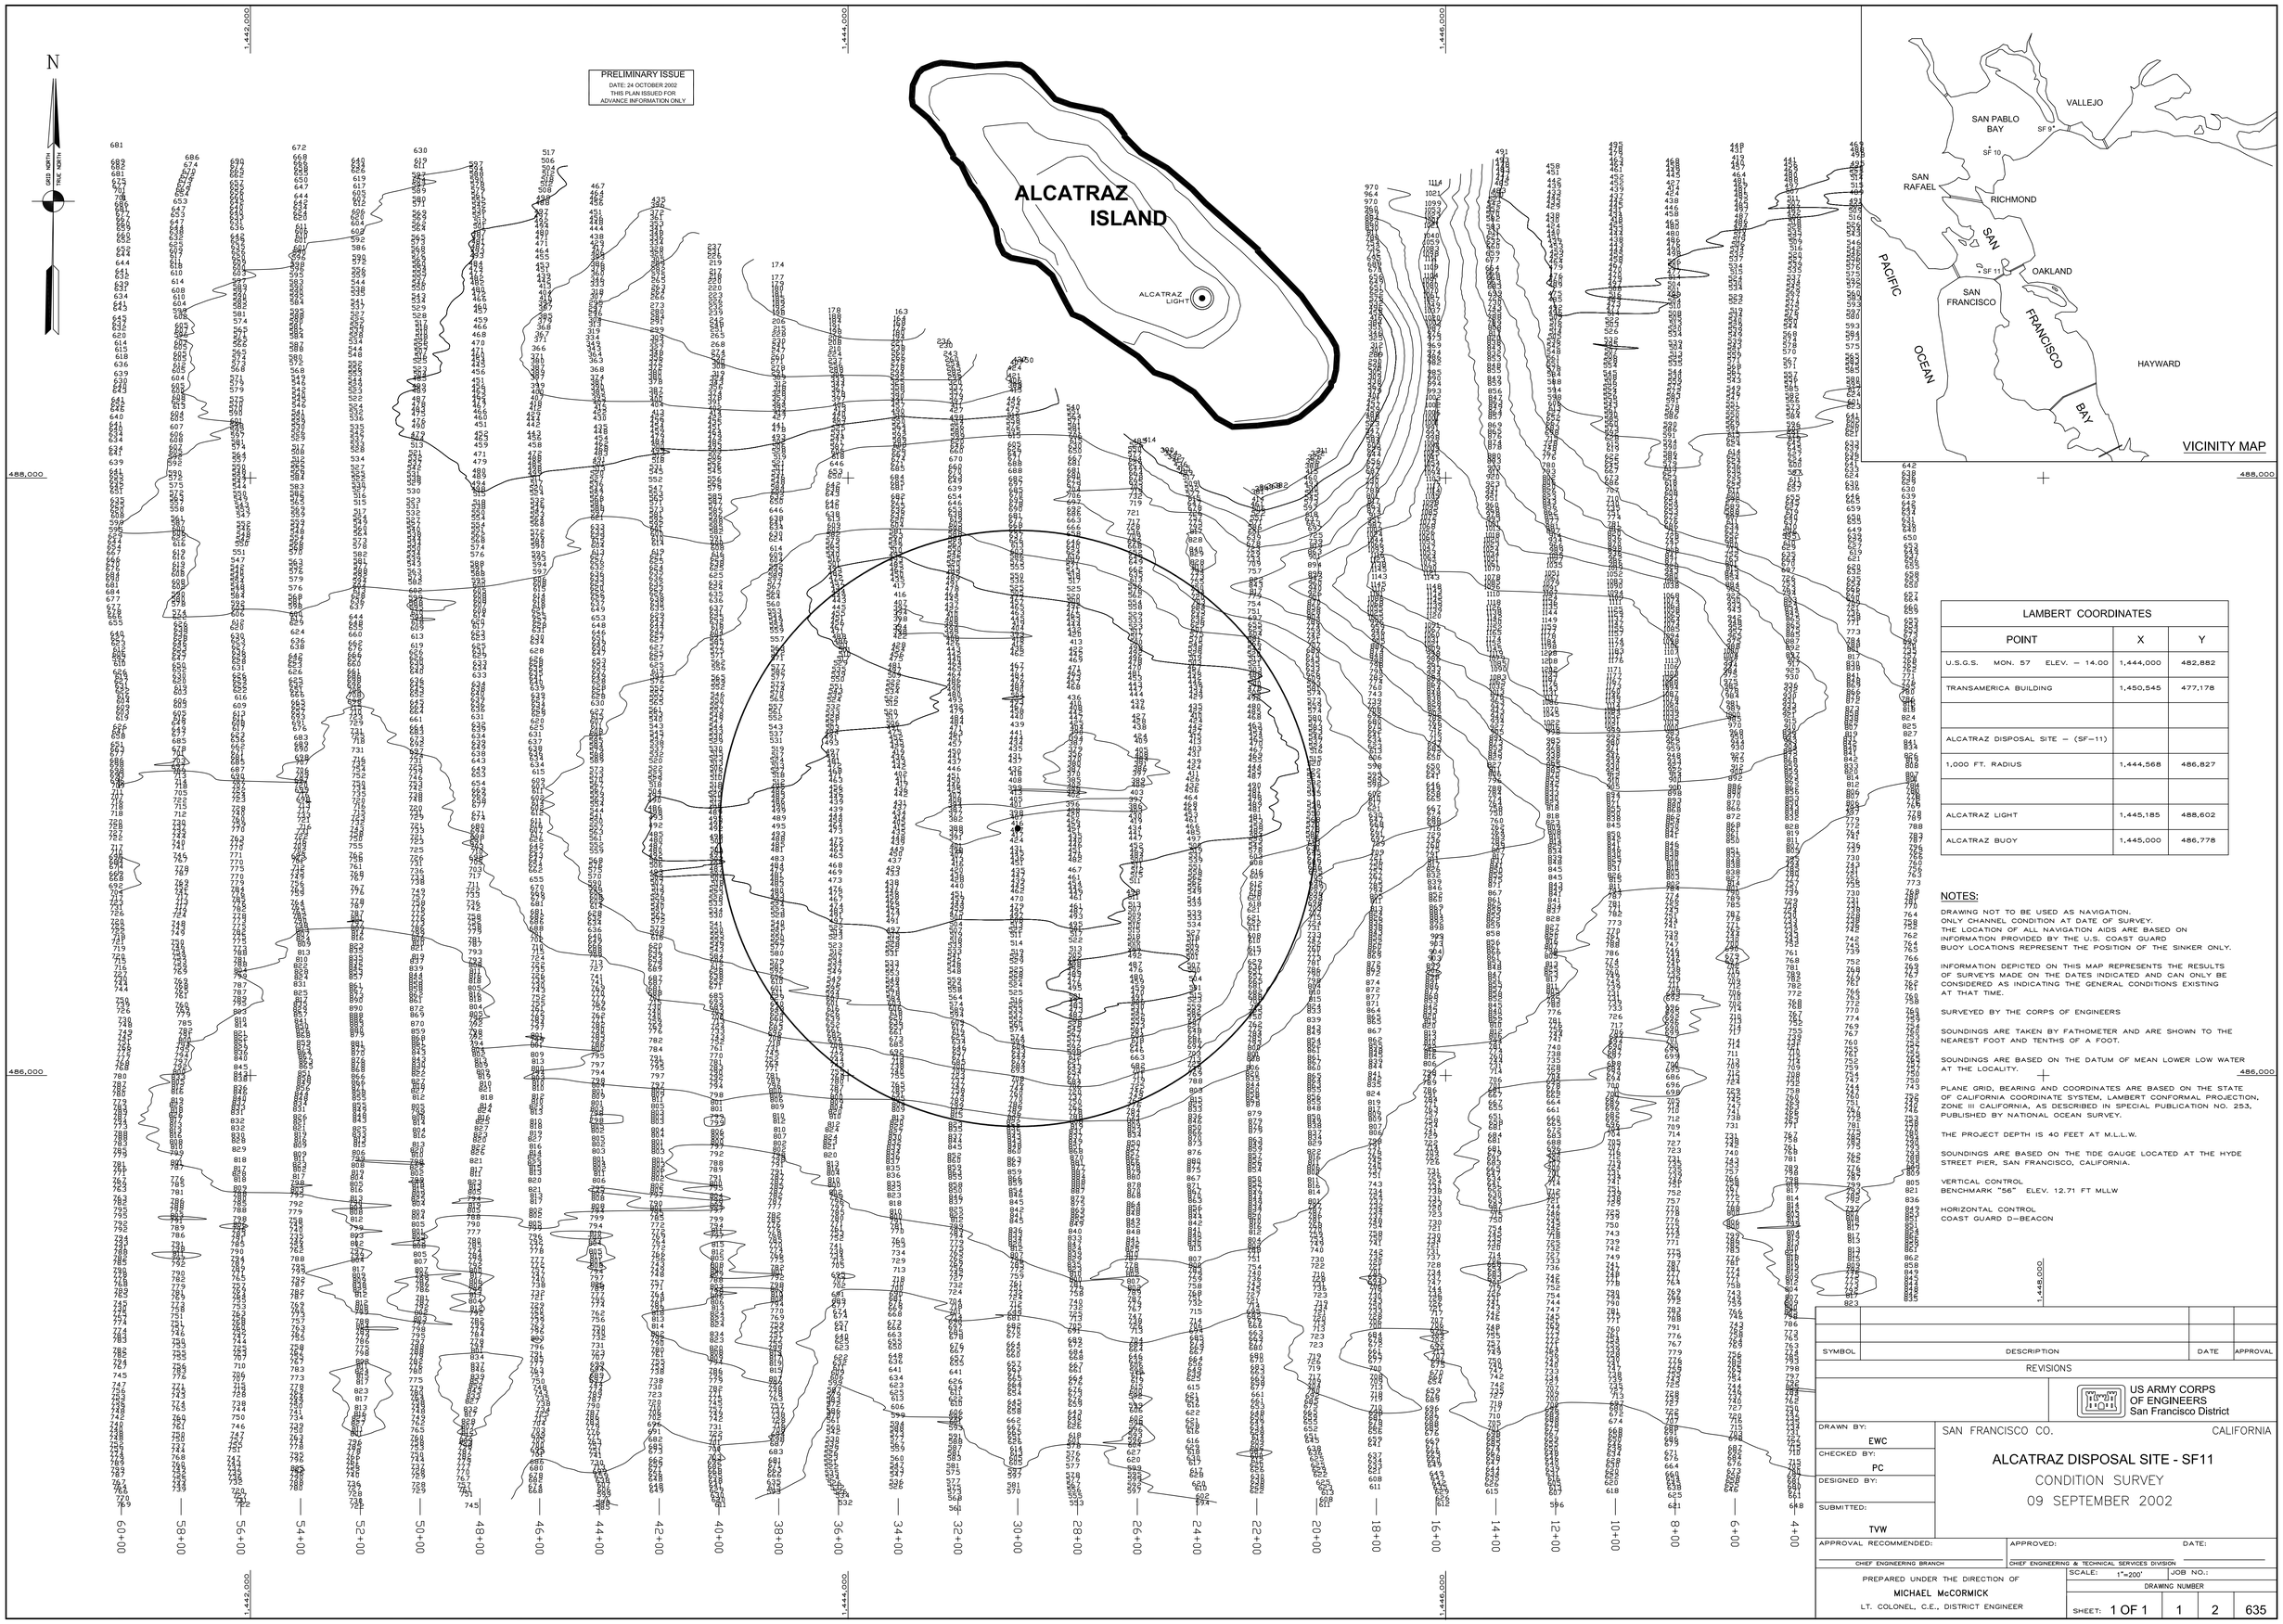

LAMBERT COORDINATES		
POINT	X	Y
U.S.G.S. MON. 57 ELEV. – 14.00	1,444,000	482,882
TRANSAMERICA BUILDING	1,450,545	477,178
ALCATRAZ DISPOSAL SITE – (SF–11)		
1,000 FT. RADIUS	1,444,568	486,827
ALCATRAZ LIGHT	1,445,185	488,602
ALCATRAZ BUOY	1,445,000	486,778

NOTES:

DRAWING NOT TO BE USED AS NAVIGATION.
ONLY CHANNEL CONDITION AT DATE OF SURVEY.
THE LOCATION OF ALL NAVIGATION AIDS ARE BASED ON INFORMATION PROVIDED BY THE U.S. COAST GUARD
BUOY LOCATIONS REPRESENT THE POSITION OF THE SINKER ONLY.

INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME.

SURVEYED BY THE CORPS OF ENGINEERS

SOUNDINGS ARE TAKEN BY FATHOMETER AND ARE SHOWN TO THE NEAREST FOOT AND TENTHS OF A FOOT.

SOUNDINGS ARE BASED ON THE DATUM OF MEAN LOWER LOW WATER AT THE LOCALITY.

PLANE GRID, BEARING AND COORDINATES ARE BASED ON THE STATE OF CALIFORNIA COORDINATE SYSTEM, LAMBERT CONFORMAL PROJECTION, ZONE III, CALIFORNIA, AS DESCRIBED IN SPECIAL PUBLICATION NO. 253, PUBLISHED BY NATIONAL OCEAN SURVEY.

THE PROJECT DEPTH IS 40 FEET AT M.L.L.W.

SOUNDINGS ARE BASED ON THE TIDE GAUGE LOCATED AT THE HYDE STREET PIER, SAN FRANCISCO, CALIFORNIA.

VERTICAL CONTROL
BENCHMARK "56" ELEV. 12.71 FT MLLW

HORIZONTAL CONTROL
COAST GUARD D–BEACON

SYMBOL	DESCRIPTION	DATE	APPROVAL
	REVISIONS		

US ARMY CORPS OF ENGINEERS
San Francisco District

DRAWN BY: EWC
CHECKED BY: PC
DESIGNED BY:
SUBMITTED: TVW

SAN FRANCISCO CO. CALIFORNIA

ALCATRAZ DISPOSAL SITE - SF11

CONDITION SURVEY
09 SEPTEMBER 2002

APPROVAL RECOMMENDED: CHIEF ENGINEERING BRANCH
APPROVED: CHIEF ENGINEERING & TECHNICAL SERVICES DIVISION
DATE:

PREPARED UNDER THE DIRECTION OF
MICHAEL McCORMICK
LT. COLONEL, C.E., DISTRICT ENGINEER

SCALE: 1"=200'
JOB NO.:
DRAWING NUMBER
SHEET: 1 OF 1 | 1 | 2 | 635