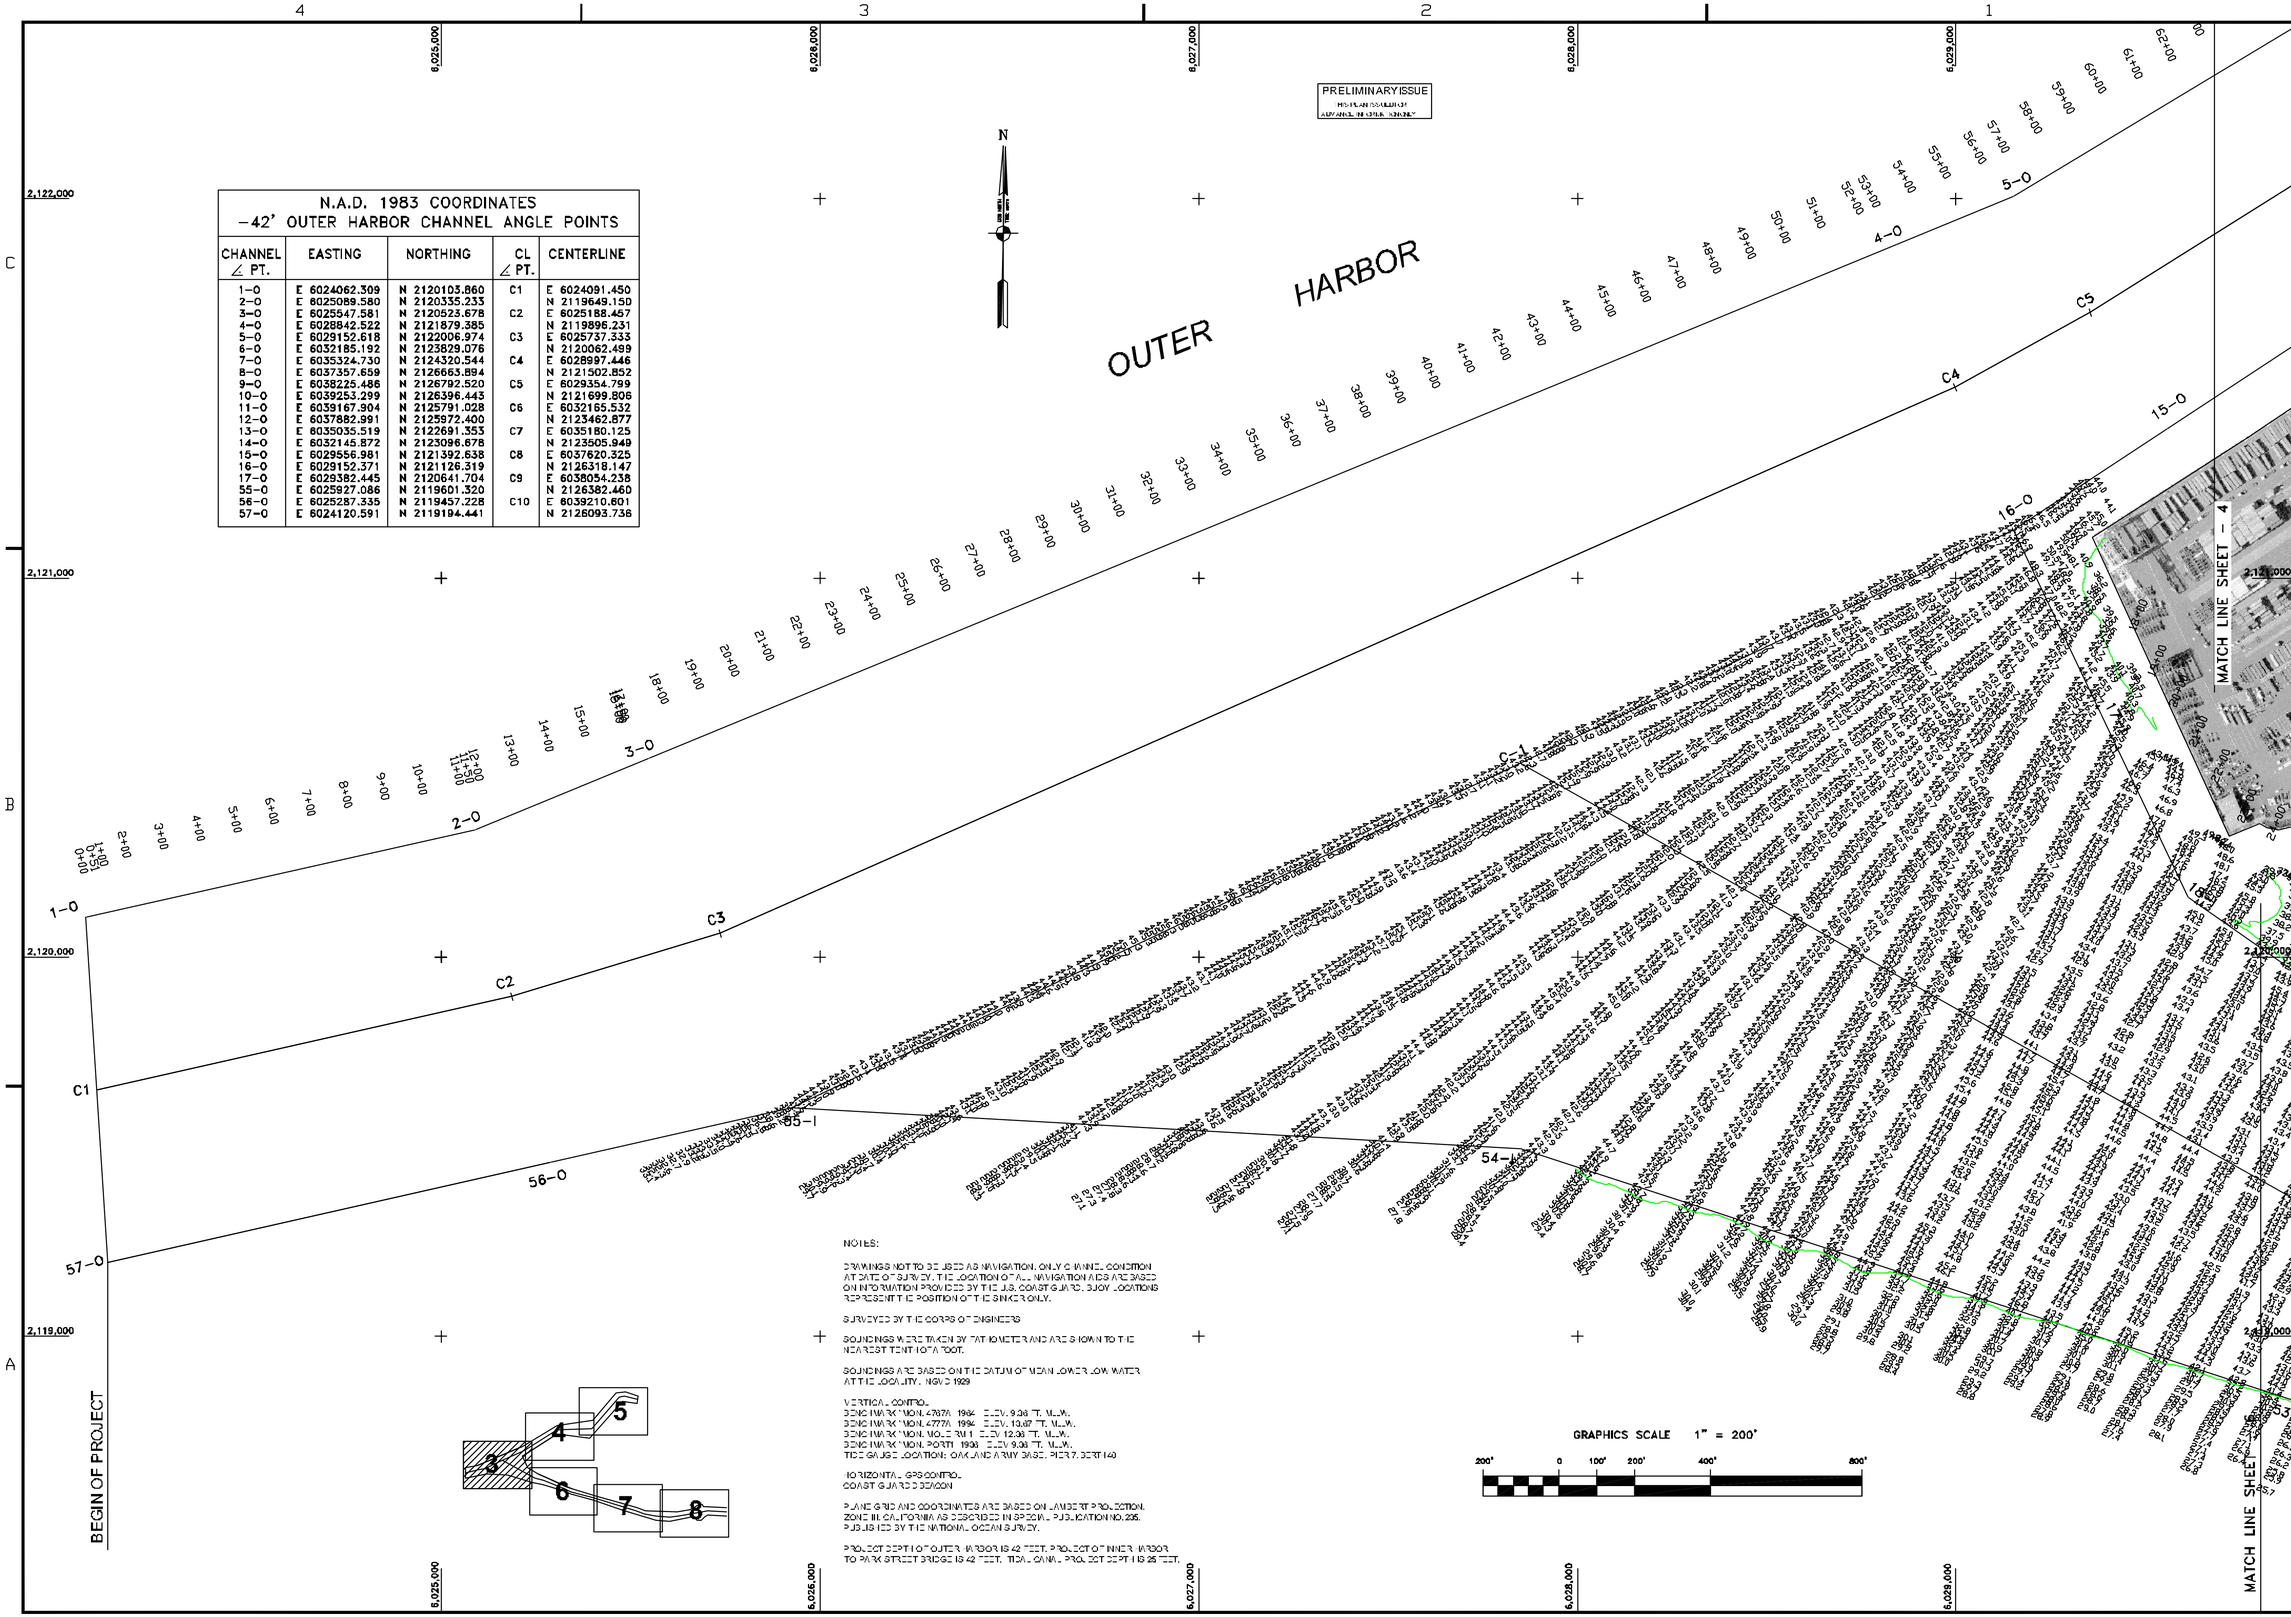

N.A.D. 1983 COORDINATES -42' OUTER HARBOR CHANNEL ANGLE POINTS				
CHANNEL ∠ PT.	EASTING	NORTHING	CL ∠ PT.	CENTERLINE
1-0	E 6024062.309	N 2120103.860	C1	E 6024091.450
2-0	E 6025089.580	N 2120335.233		N 2119649.150
3-0	E 6025547.581	N 2120523.678	C2	E 6025188.457
4-0	E 6028842.522	N 2121879.385		N 2119896.231
5-0	E 6029152.618	N 2122006.974	C3	E 6025737.333
6-0	E 6032185.192	N 2123829.076		N 2120062.499
7-0	E 6035324.730	N 2124320.544	C4	E 6028997.446
8-0	E 6037357.659	N 2126663.894		N 2121502.852
9-0	E 6038225.486	N 2126792.520	C5	E 6029354.799
10-0	E 6039253.299	N 2126396.443		N 2121699.806
11-0	E 6039167.904	N 2125791.028	C6	E 6032165.532
12-0	E 6037882.991	N 2125972.400		N 2123462.877
13-0	E 6035035.519	N 2122691.353	C7	E 6035180.125
14-0	E 6032145.872	N 2123096.678		N 2123505.949
15-0	E 6029556.981	N 2121392.638	C8	E 6037620.325
16-0	E 6029152.371	N 2121126.319		N 2126318.147
17-0	E 6029382.445	N 2120641.704	C9	E 6038054.238
55-0	E 6025927.086	N 2119601.320		N 2126382.460
56-0	E 6025287.335	N 2119457.228	C10	E 6039210.601
57-0	E 6024120.591	N 2119194.441		N 2126093.736

NOTES:

DRAWINGS NOT TO BE USED AS NAVIGATION. ONLY CHANNEL CONDITION AT DATE OF SURVEY. THE LOCATION OF ALL NAVIGATION AIDS ARE BASED ON INFORMATION PROVIDED BY THE U.S. COAST GUARD. BUOY LOCATIONS REPRESENT THE POSITION OF THE SINKER ONLY.

SURVEYED BY THE CORPS OF ENGINEERS

SOUNDINGS WERE TAKEN BY FATHOMETER AND ARE SHOWN TO THE NEAREST TENTH OF A FOOT.

SOUNDINGS ARE BASED ON THE DATUM OF MEAN LOWER LOW WATER AT THE LOCALITY. NGVD 1929

VERTICAL CONTROL
BENCHMARK MON. 4767A 1984 ELEV. 9.06 FT. MLLW.
BENCHMARK MON. 4777A 1984 ELEV. 10.67 FT. MLLW.
BENCHMARK MON. MOLE RM 1 ELEV. 12.06 FT. MLLW.
BENCHMARK MON. PORT1 1986 ELEV. 9.06 FT. MLLW.
TIDE GAUGE LOCATION: OAKLAND ARMY BASE, PIER 7, BERTH 40

HORIZONTAL GPS CONTROL
COAST GUARD DBEACON

PLANE GRID AND COORDINATES ARE BASED ON LAMBERT PROJECTION. ZONE III, CALIFORNIA AS DESCRIBED IN SPECIAL PUBLICATION NO. 235. PUBLISHED BY THE NATIONAL OCEAN SURVEY.

PROJECT DEPTH OF OUTER HARBOR IS 42 FEET. PROJECT OF INNER HARBOR TO PARK STREET BRIDGE IS 42 FEET. TIDAL CANAL PROJECT DEPTH IS 25 FEET.

US Army Corps of Engineers
San Francisco District
333 Market Street
San Francisco, CA 94105

Mark	Description	Date	Appr.

SUBMITTED: PC
Hydro Survey Section
APPROVAL RECOMMENDED:
Chief, Engineering Branch
APPROVED:
Chief, Engineering Technical & Services Div.

DESIGNED BY:
DATE: 6/25/2003
CHECKED BY: TVW
SHEET NO. 3 OF 8
DRAWN BY: EWC
DRAWING NO. 2 2 343

PREPARED UNDER THE DIRECTION OF
MICHAEL McCORMICK
LT. COLONEL, C.E., DISTRICT ENGINEER

ALAMEDA COUNTY CALIFORNIA

OAKLAND INNER HARBOR
POSTDREDGE SURVEY
20, 24 & 25 JUNE 2003

Sheet reference number
C3