
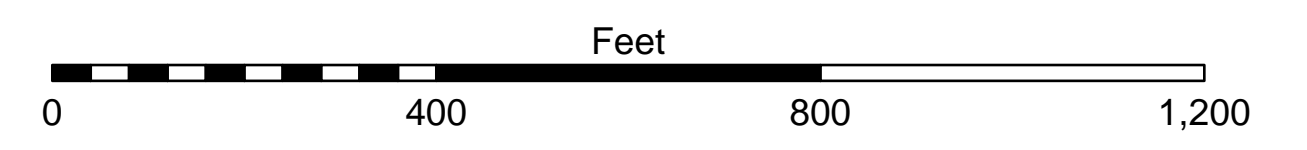


**DISCLAIMER**  
 The United States Government furnishes this data and the U.S. Coast Guard does not assume any liability for its use. The user is responsible for the accuracy of the data and the data furnished. The United States does not assume any liability for any error or omission in the data or for any application of the data for other than its intended purpose. The user is responsible for the results of any application of the data for other than its intended purpose.

Prepared Under the Direction of <b>JOHN C. MORROW</b> LT. COLONEL, C.E., DISTRICT ENGINEER	Surveyed By: PDT	Chart Date: Mar 06, 2015
Supervised: Hydro Survey Team Leader	Plotted By: PDT	Designed by:
Recommended: Chief, Hydro Survey Section	Checked By: PDT	Drawn by: PDT
Approved: Chief, Construction Branch		

CALIFORNIA  
**SACRAMENTO RIVER**  
 POSTDREDGE SURVEY  
 02 DECEMBER 2014  
 STA. 640+00 TO 700+00

SAN JOAQUIN COUNTY  
**Sheet Reference Number**  
 13 of 45

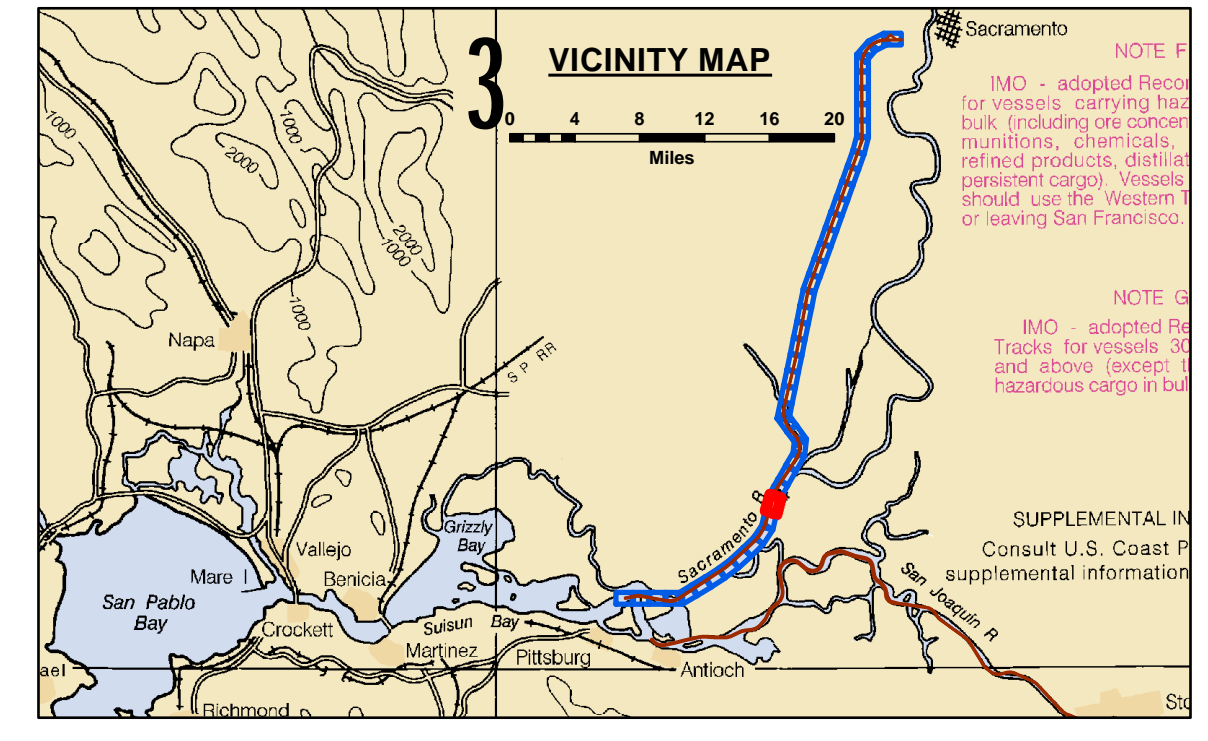

LEGEND		
--- Federal Navigation Channel	▨ Cable Area	■ Shoaling Area
— Federal Navigation Center Line	□ Placement Area	⊂ Shoalest Sounding**
⋯ Cable Submarine	▭ Anchorage Area	⊥ Beacon, General
- - - Cable Overhead	⊘ Obstruction Point	⊗ Red Navigation Buoy
— Contour Line	⊙ Wrecks-Submerged	⊗ Green Navigation Buoy

**NOTES:**  
 Horizontal Coordinate System:  
 North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Oregon North Zone. Distance units in U.S. Survey Feet.  
 Vertical Datum:  
 Soundings are shown in feet and indicate depths below Columbia River Datum. CRD is 1.05 feet above the North American Vertical Datum of 1988 (NAVD 88 Geoid 09) at Columbia River Mile 27.0.  
 River mileage conforms to the River Mile Index of the Hydrology and Hydraulics Committee, Pacific Northwest River Basins Commission, July 1972.  
 The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered to represent the general condition existing at that time.  
 The location of navigation aids are based on and provided by the U.S. Coast Guard.  
 2009 Aerial Photography data source: U.S.D.A., Service Center Agencies.  
 Reference is N.O.A.A. Navigation Chart No. 18521.  
 \*\* Shoalest Sounding per Quarter per Reach.

Project Information:  
 Drawing not to be used for navigation.  
 Project Depth -35'  
 Tide gauge  
 Equipment statement

CONTROLS:  
 LOCATION: RIO VISTA  
 NOAA STATION: 9415316  
 BENCHMARK: 5216 B 1996 (No PID)  
 TIDE GAUGE: Nail @ 8.2 ft MLLW  
 METADATA: Nail set by USACE 31 March, 2014

LOCATION: PORT OF WEST SACRAMENTO  
 NOAA STATION: 9416131  
 BENCHMARK: POW51 (No PID)  
 TIDE GAUGE: Nail @ 10.0 ft MLLW  
 METADATA: Nail set by USACE 8 April, 2014

All horizontal positions and MLLW elevations were post-processed using public GPS reference stations in the area.